
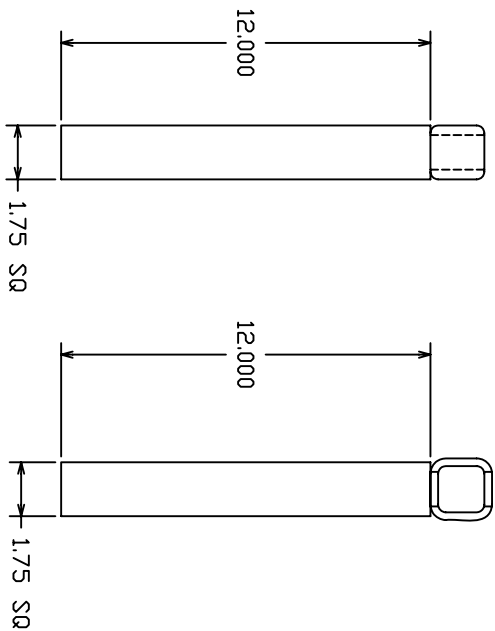
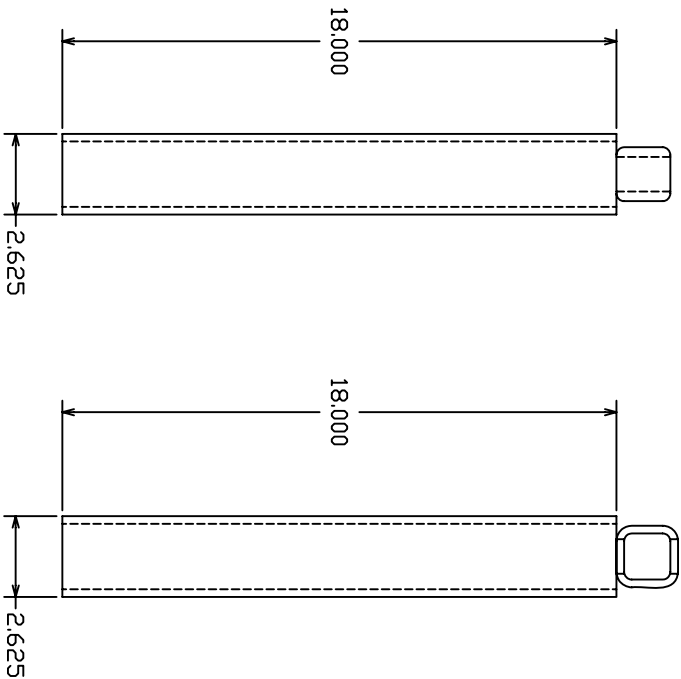


# STANDARD UNDERPINNING BRACKET T-PIPES FOR C150-0121 BRACKET

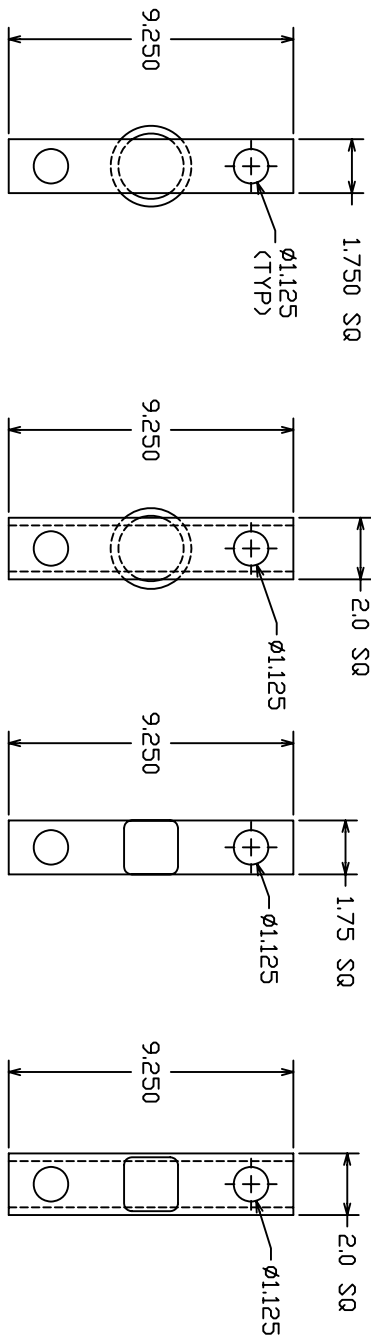


SS5/SS150  
C150-0487  
RATED: 40/80 KIP

SS5/SS150  
C150-0486  
RATED: 20/40 KIP

278  
C278-0002  
RATED: 40/80 KIP

278  
C278-0001  
RATED: 20/40 KIP

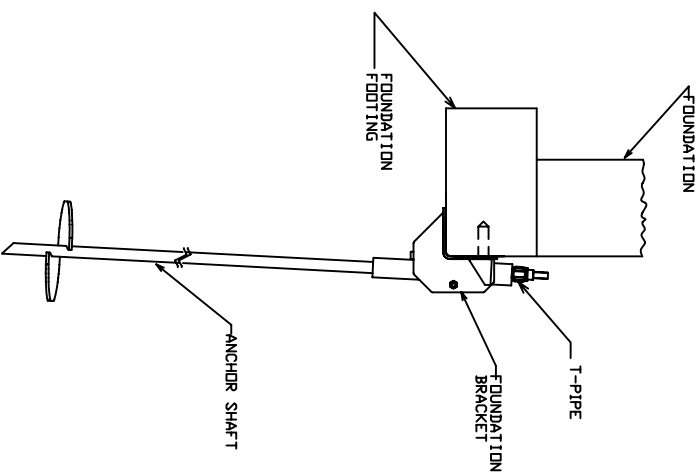

TYPICAL INSTALLATION  
FOUNDATION REPAIR BRACKET

### -NOTES-

1. HOT DIP GALVANIZE PER ASTM A153-(LATEST REVISION).
2. FOR BRACKET DRAWING SEE SA150-0121.
3. TUBE LIFTING BAR PER ASTM A500 GRADE B.
4. SOLID LIFTING BAR MATERIAL: HOT ROLLED ROUNDED CORNERED SQUARE SOLID STEEL BAR PER ASTM A29 WITH A MINIMUM YIELD STRENGTH 90 KSI.

CHANGE TOLERANCE CHART

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE CONTENTS ARE NOT TO BE REPRODUCED, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. UNPUBLISHED HUBBELL POWER SYSTEMS. ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

HUBBELL POWER SYSTEMS  
T-PIPES FOR  
STANDARD BRACKET

SIZE	DWG NO.	DWG BY	DATE	REV
C	SA1-PIPES	---	---	---
DO NOT SCALE THIS DRAWING	DRN BY KSH	DATE 6/15/05	SHEET 1	DF 1